


Stable Braid

RIGGING LINE

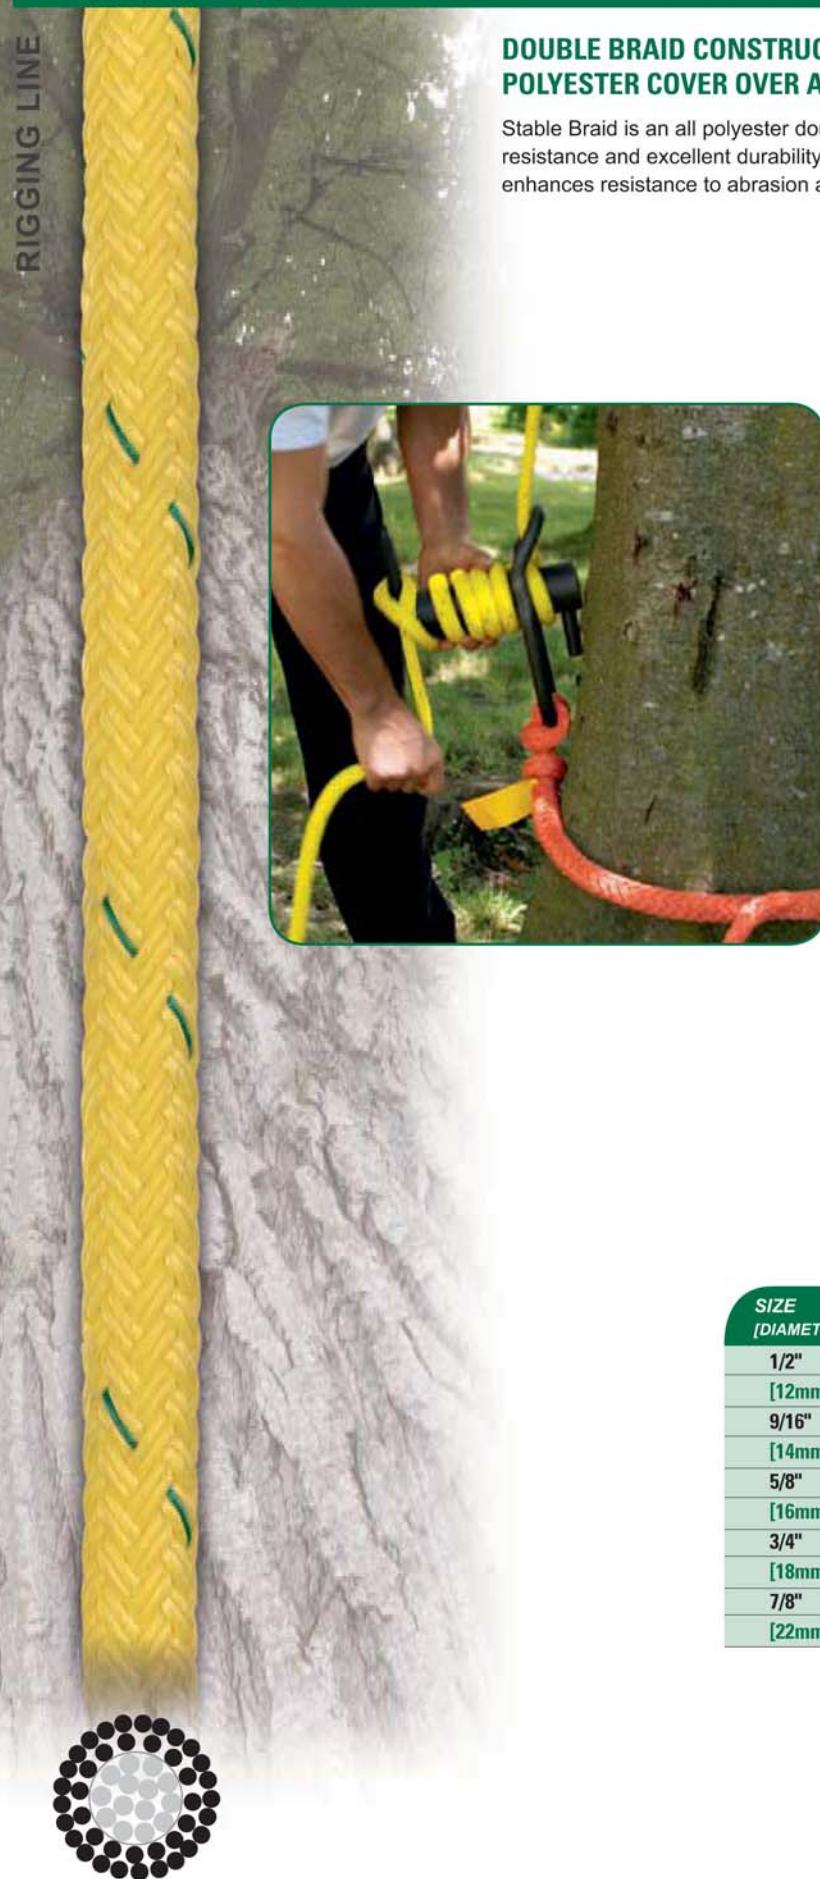

DOUBLE BRAID CONSTRUCTION CONSISTING OF A BRAIDED POLYESTER COVER OVER A BRAIDED POLYESTER CORE

Stable Braid is an all polyester double braid rope with high strength, low stretch, snag resistance and excellent durability. Bright Samthane coating improves visibility and enhances resistance to abrasion and snagging.

FEATURES

- Low stretch
- Excellent abrasion resistance
- High strength-to-weight ratio
- Flexible and easy to handle
- Minimal UV degradation
- Torque-free
- Spliceable

COLOR OPTIONS



ELASTIC ELONGATION

	10%	20%	30%
	1.10%	1.70%	2.70%

After 50 cycles at % of break strength.

SIZE [DIAMETER]	WEIGHT PER 100 FT / [100M]	AVERAGE STRENGTH SPLICED	WORKING LOAD SPLICED
1/2"	8.2 lbs.	10,400 lbs.	2,100 lbs.
[12mm]	[12.2Kg]	[4,700Kg]	[940Kg]
9/16"	11.0 lbs.	13,300 lbs.	2,700 lbs.
[14mm]	[16.4Kg]	[6,000Kg]	[1,200Kg]
5/8"	14.0 lbs.	16,300 lbs.	3,300 lbs.
[16mm]	[20.8Kg]	[7,400Kg]	[1,500Kg]
3/4"	18.0 lbs.	20,400 lbs.	4,100 lbs.
[18mm]	[26.8Kg]	[9,300Kg]	[1,900Kg]
7/8"	27.1 lbs.	29,900 lbs.	6,000 lbs.
[22mm]	[40.3Kg]	[13,600Kg]	[2,700Kg]

STANDARD PACKAGED LENGTHS

150' Polybag	Unspliced
600' Reel	Unspliced